



HDS Hardscal

Mechanical internal tubes cleaning

Maintenance

Tubes cleaner





A winning story since 1961

The Beginning

At the end of the 1950s, Domenico Franco Agostino became the Italian representative of Albert Otto, a German manufacturer of tube expanders. In 1961 Franco Agostino's Albert Otto Italiana was founded and in 1972, after purchasing an area of 10,000 square metres in the municipality of Bagnolo Cremasco, Maus Italia Sas was established.

The Growth

In 1976 his son Stefano, a mechanical engineer, joined the company. Together with his father, he studied products, introduced new machinery onto the market and filed the first patents by Maus Italia. Above all, Stefano was firmly convinced that people are the very heart of a company's success. Therefore, he invested in human capital by valuing people and roles, and he surrounded himself with skilled operators as well as technical, commercial and administrative collaborators. The result was a winning, competent and proactive team.

His daughter Anna - also a mechanical engineer - has been working in the company since 2016, giving new impetus and energy to the business her father and grandfather had built.

Father and daughter work together side by side every day to guarantee the excellence of Maus Italia and support all customers worldwide with competence and passion: the company's distinctive traits.



Stefano Agostino CEO - Mechanical Engineer

Anna Agostino

COO - Mechanical and Management Engineer











In-house production of each component Workshop 4.0 and 24/7 production control

The production of Maus Italia branded items is entirely carried out in Bagnolo Cremasco, in the heart of an Italian industrial area 30 km southeast of Milan.

The company boasts a 4.0 workshop equipped with state-of-the-art machinery, an in-house heat treatment room and a final inspection department that allow Maus Italia to independently manage every phase of the manufacturing process of its wide range of products whilst maintaining high quality standards.



Quality first. Design and development

One of Maus Italia's strengths is its willingness to understand its customers' needs.

Our technical department is always ready to find operational solutions to the most complex applications, even via feasibility studies. We develop accurate work processes, draw with FEM analyses to verify our mechanical-structural performance and optimise the manufacturing process of each component.

Ready To Deliver

A well-stocked and complete warehouse of finished products enables Maus Italia ship quickly to customers all over the world according to a ready-to-deliver logic.

The warehouse is fully located within our premises in Bagnolo Cremasco at controlled temperatures and conditions to guarantee the maximum safety and quality of Maus Italia products for all our customers.

Quality, environment and safety policy

Research, quality and safety are the watchwords of Maus Italia Spa.

Maus Italia has several projects underway aimed at increasingly sustainable development and integrates environmental concerns into its business model. The company's actions, behaviour and development choices are focused not only on the short run but rather mainly on a medium and long-term horizon.



Every day in over 80 country worldwide

Find an official distributor in your country






HDS Hardscal

Mechanical internal cleaning with rigid shafts for heat exchanger tubes

The pneumatic cleaners with modular rigid shafts and water cooling of the tool, are the simplest and most effective solution for cleaning double sheet heat exchanger tubes, even if they are completely obstructed.

By selecting the appropriate model of cleaning tool according to the characteristics of the residue inside the tubes, you guarantee a deep clean. The continuous flow of running water through the drainage holes in the tools, with a maximum pressure of 20 Bars (290 psi), provides cooling during operation as well as providing drainage of the removed material.




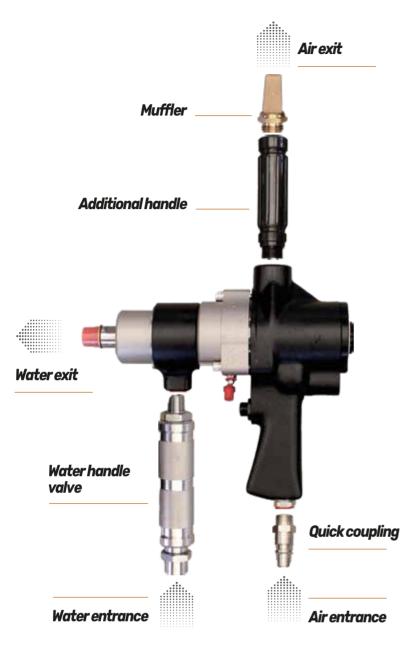



- Standard supply
- > Air hose 1/2" Lenght 6m (19.7 fts)
- > Water hose 3/8" Lenght 6m (19.7 fts)
- > Muffler
- > Additional handle
- > Water handle valve
- > Air lubrificator
- > Set of spare vanes
- > Operating handbook



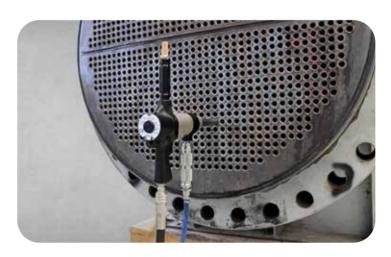





Hardscal			HD\$3200			HDS950		
			1 1 1					
R.p.m			3200	3200		950	950	
Tube O.D. (from ÷ to)	mm	u	9,5 ÷ 25,4	3/8" - 1"		9,5 ÷ 63,5	3/8" ÷ 2.1/2"	
Dimensions LxDxH/H1	mm	u	242 x 66 x 300/400	9,5" x 2,6" x 11,8"/15,8"		277 x 66 x 300/400	10,9" x 2,6" x 11,8"/15,8"	
Weight	Kg	Lb	3,5	7.8		4,5	10	
Pressure	Bar	Psi	6-7	90-100		6-7	90-100	
Air consumption	Lt/min	Cfm	840	30		840	30	

Technical specifications



\ ~											
Ø		Drive coupling		Drive shaft				Shaft coupling		Driven shaft	
mm i	inches	Model	Thread	Model	mm	inches	Thread	Model	Thread	Model	Thread
7,39 ÷ 9,09 C	0.291 ÷ 0.358	MAT-337-A	5/8" NF x 1/4" NF	MCC-336	6,35	1/4	1/4" NF X 10-32 F	MCC-334	10-32 M	MCC-335	10-32 F X 10-32 F
9,09 ÷ 10,67 C	0.359 ÷ 0.335	MAT-333-A	5/8" NF x 5/16" NF	MCC-332	7,94	5/16	5/16" NF X 1/4" NFF	MCC-330	1/4" NFM	MCC-331	1/4" NFF X 1/4" NFF
10,67 ÷ 12,27 C	0.421 ÷ 0.483	MAT-321-A	5/8" NF x 3/8" NF	MCC-324	9,52	3/8	3/8" NF X 1/4" NFF	MCC-322	1/4" NFM	MCC-323	1/4" NFF X 1/4" NFF
12,27 ÷ 15,44 C	0.484 ÷ 0.608	MAT-313-A	5/8" NF x 7/16" NF	MCC-316	11,11	7/16	7/16" NF X 5/16" NFF	MCC-314	5/16" NFM	MCC-315	5/16" NFF X 5/16" NFF
15,44 ÷ 17,72 C	0.609 ÷ 0.737	MAT-309-A	5/8" NF x 1/2" NF	MCC-312	12,70	1/2	1/2" NF X 3/8" NFF	MCC-310	3/8" NFM	MCC-311	3/8" NFF X 3/8" NFF
17,72 ÷ 21,11 C	0.738 ÷ 0.831	MAT-305-A	5/8" NF x 9/16" NF	MCC-308	14,29	9/16	9/16" NF X 3/8" NFF	MCC-306	3/8" NFM	MCC-307	3/8" NFF X 3/8" NFF
21,11 ÷ 26,80 C	0.832 ÷ 1.055	MAT-301-A	5/8" NF x 5/8" NF	MCC-304	15,88	5/8	5/8" NF X 3/8" NFF	MCC-302	3/8" NFM	MCC-303	3/8" NFF X 3/8" NFF
26,80 ÷ 39,65 1	1.056 ÷ 1.561	MAT-317-A	5/8" NF x 3/4" NF	MCC-320	19,05	3/4	3/4" NF X 7/16" NFF	MCC-318	7/16" NFM	MCC-319	7/16" NFF x 7/16" NFF
39,65 ÷ 60,30 1	1.562 ÷ 2.374	MAT-325-A	5/8" NF x 1" NF	MCC-328	25,40	1	1" NF X 7/16" NFF	MCC-326	7/16" NFM	MCC-327	7/16" NFF x 7/16" NFF

Cleaning drills and brushes Widia tips Ø **@** Tool Size connection inches MR inches mm inches mm MAT MTW MCR **MCT** $9.12 \div 9.88$ $0.359 \div 0.389$ 8.7 0.343 **MAT 201** MTW 201 MCB 201 MCT 201 MB 201 MCT 202 $9.91 \div 10.67$ $0.390 \div 0.420$ 9.5 0.375 MAT 202 MTW 202 MCB 202 MB 202 6,35 1/4 10,69 ÷ 11,48 $0.421 \div 0.452$ 10,3 0.406 **MAT 203** MTW 203 MCB 203 MCT 203 MB 203 MCT 204 11.48 ÷ 12.27 0.452 ± 0.483 11.1 0.437 MAT 204 MTW 204 MCB 204 MB 204 12,29 ÷ 13,06 $0.484 \div 0.514$ 11,9 0.468 **MAT 205** MTW 205 MCB 205 MCT 205 MB 205 13,08 ÷ 13,84 $0.515 \div 0.545$ 12,7 0.500 **MAT 206** MTW 206 MCB 206 MCT 206 MB 206 MCT 207 MB 207 13,87 ÷ 14,66 $0.546 \div 0.577$ 13.5 0.531 7,93 5/16 **MAT 207** MTW 207 MCB 207 MCB 208 MCT 208 MB 208 14.68 ÷ 15.44 0.578 ± 0.608 14.3 0.562 MAT 208 MTW 208 MCB 108 MCT 108 MB 108 14,68 ÷ 15,44 $0.578 \div 0.608$ 14,3 0.562 **MAT 108** MTW 108 15,47 ÷ 16,23 $0.609 \div 0.639$ 15,1 0.593 **MAT 209** MTW 209 MCB 209 MCT 209 MB 209 MTW 210 MB 210 16,26 ÷ 17,15 $0.640 \div 0.675$ 15.9 0.625 **MAT 210** MCB 210 MCT 210 17,17 ÷ 17,93 0.676 ÷ 0.706 16,7 0.656 **MAT 211** MTW 211 MCB 211 MCT 211 MB 211 17,96 ÷ 18,72 $0.707 \div 0.737$ 17,5 0.687 **MAT 212** MTW 212 MCB 212 MCT 212 MB 212 18.75 ÷ 19.53 $0.738 \div 0.769$ 18.2 0.718 **MAT 213** MTW 213 MCR 213 MCT 213 MB 213 19,56 ÷ 20,32 0.750 **MAT 214** MTW 214 MCB 214 MCT 214 MB 214 $0.770 \div 0.800$ 19.1 20.35 ÷ 21.11 $0.801 \div 0.831$ 19.9 0.781 **MAT 215** MTW 215 MCB 215 MCT 215 MB 215 9,52 3/8 21,13 ÷ 21,89 $0.832 \div 0.862$ 20,6 0.812 **MAT 216** MTW 216 MCB 216 MCT 216 MB 216 21.4 0.843 **MAT 217** MTW 217 MCB 217 MCT 217 MB 217 21.92 ÷ 22.71 0.863 ± 0.894 22,73 ÷ 23,50 $0.895 \div 0.925$ 22,2 0.875 **MAT 218** MTW 218 MCB 218 MCT 218 MB 218 23,52 ÷ 24,28 $0.926 \div 0.956$ 23,0 0.906 **MAT 219** MTW 219 MCB 219 MCT 219 MB 219 24,31 ÷ 25.07 $0.957 \div 0,987$ 23.8 0.937 **MAT 220** MTW 220 MCB 220 MCT 220 MB 220 25,35 ÷ 26,01 24,6 0.968 **MAT 221** MTW 221 MCB 221 MCT 221 MB 221 $0.998 \div 1.024$ 26,04 ÷ 26,80 25,4 1.000 **MAT 222** MTW 222 MCB 222 MCT 222 MB 222 1.025 ÷ 1.055 26,82 ÷ 27,58 1.031 MB 223 1.056 ÷ 1.086 26,2 **MAT 223** MTW 223 MCB 223 MCT 223 27,61 ÷ 28,37 27,0 1.062 1.087 ÷ 1.117 **MAT 224** MTW 224 MCB 224 MCT 224 MB 224 28,40 ÷ 29,18 1.118 ÷ 1.149 27,8 1.093 **MAT 225** MTW 225 MCB 225 MCT 225 MB 225 29,21 ÷ 29,97 1.150 ÷ 1.180 28,6 1.125 **MAT 226** MTW 226 MCB 226 MCT 226 MB 226 MCT 227 $30.00 \div 30.76$ 1.181 ÷ 1.211 294 1156 MAT 227 MTW 227 MCB 227 MB 227 30,78 ÷ 31,55 1.212 ÷ 1.242 30,2 1.187 **MAT 228** MTW 228 MCB 228 MCT 228 MB 228 31,57 ÷ 32,51 1.243 ÷ 1.280 30,9 1.218 **MAT 229** MTW 229 MCB 229 MCT 229 MB 229 11,11 7/16 32,54 ÷ 33,30 1.281 ÷ 1.311 31,8 1.250 MAT 230 MTW 230 MCB 230 MCT 230 MB 230 MCB 231 MCT 231 MB 231 $33.32 \div 34.09$ 1.312 ÷ 1.342 32.5 1.281 **MAT 231** MTW 231 MTW 232 MCB 232 MCT 232 MB 232 34,11 ÷ 34,90 1.343 ÷ 1.374 33,3 1.312 MAT 232 34,93 ÷ 35,69 1.375 ÷ 1.405 34,1 1.343 **MAT 233** MTW 233 MCB 233 MCT 233 MB 233 35,71 ÷ 36,47 1.406 ÷ 1.436 MTW 234 MCB 234 MCT 234 MB 234 34.9 1.375 **MAT 234**



	Friable deposits		Tough		
Completely obstructed tubes	MAT		МСВ		
Partially obstructed tubes		MTW		MCT	
Brushing					MB





mausitalia.it

